

Alba Racing

Honda 250EX Nerf Bar Instructions


- 1) Use picture #1 as an example. Mount the front nerf mount using the U bolts, washers and nylock nuts. Do NOT tighten the bolts yet.



- 2) Use picture #2 as an example to drill the holes in the foot peg to mount the nerf bar tab. Slide the front of the nerf bar on to the mount tube then hold the rear mount tab against the front of the foot peg. Be sure the top edge of the mount is below the top of the foot peg teeth. Mark the foot peg thru the holes in the nerf bar tab. Use a 1/4" drill bit to drill the marked holes. After the holes are drilled use the supplied bolts, washers and nuts to mount the tab to the foot peg. **Do NOT tighten these yet.** Now repeat this procedure for the nerf bar on the other side of the quad.



- 3) Tighten the footpeg bolts on both sides. Next, tighten the U bolts on the front mount.
- 4) Install nets per pic. (Go down, up and through).

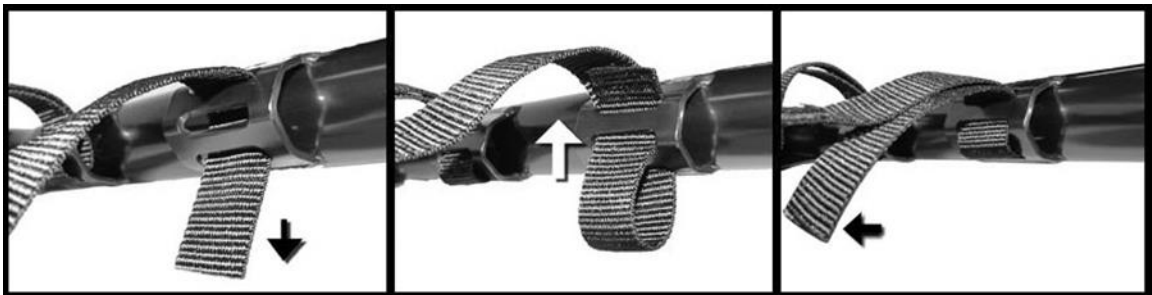

- 5) Check all the bolts to be sure they are tight. Check them again after your 1st ride and after every 2 rides in the future.