

Alba Racing

Suzuki LTZ 250 Nerf Bar Instructions

1) Using picture #1 and #2 as an example mount the front nerf mount using the long bolt, 2 spacers (one on each side), washer and nylock nut. Do **NOT** tighten the bolts yet. Install both sides mount at the same time




2) Use picture #3 and #4 as an example for mounting the nerf bars. Slide the front of the nerf bar onto the mount tube. Then hold the rear mount tab against the front of the footpeg. ***Be sure the top edge of the mount is below the top of the footpeg teeth.*** Use the supplied bolts, washers and nuts to mount the tab to the foot peg. Do **NOT** tighten these yet. Now repeat this procedure for the nerf bar on the other side of the quad.



3) Tighten the footpeg bolts on both sides. Next, tighten the bolt on the front mount.

4) Install the nets following the diagram at the bottom of this sheet.

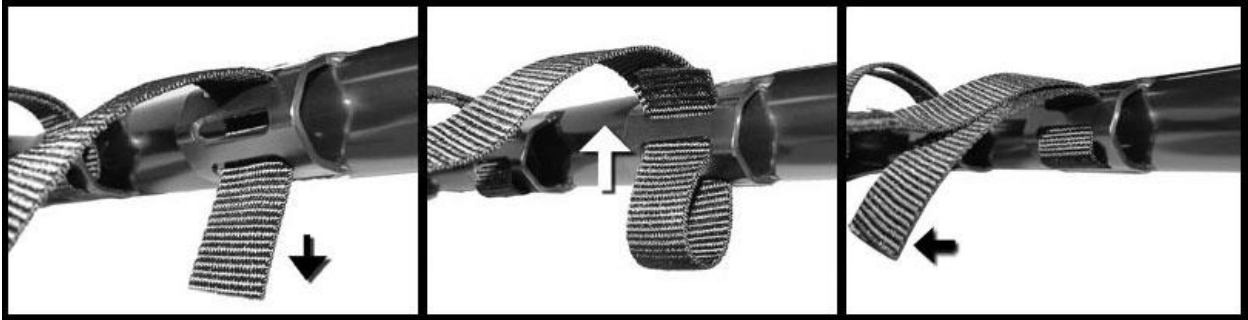

5) Check all the bolts to be sure they are tight. Check them again after your 1st ride and after every 2 rides in the future.

NOTE: These instructions are in color at teamalbaracing.com. Click 'tech center.'