



ALBA RACING RAPTOR 350 PRO PEG INSTRUCTIONS

- 1) Remove the stock heel guards.
- 2) Starting with either side nerf bar slide the front mount bracket tube into the front tube of the nerf bar. (see picture 1) Now install the back of the nerf bar to the footpeg using 2 long bolts and washers and lock nuts (see picture 2). Do not tighten the bolts yet.
- 3) Following the same procedure as in step 2 install the other side nerf bar.
- 4) Now install the front brackets. Use picture 1 and 3 as a guide. Remove the lower engine motor mount bolt. Use the supplied long bolt along with one spacer on each side. Put the nut on but do not tighten.
- 5) Now tighten the bolts that mount the nerfs to the foot pegs. Next tighten the motor mount bolt.
- 6) Attach the fender to the fender mount bracket on the nerf bar. (see picture 4)

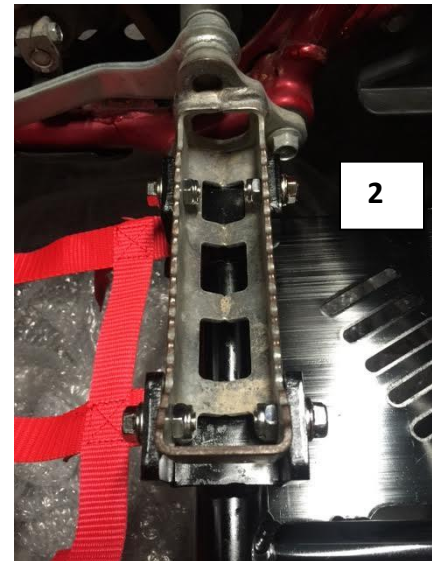

7) Install the nets following the diagram. You must go down, up and then through.

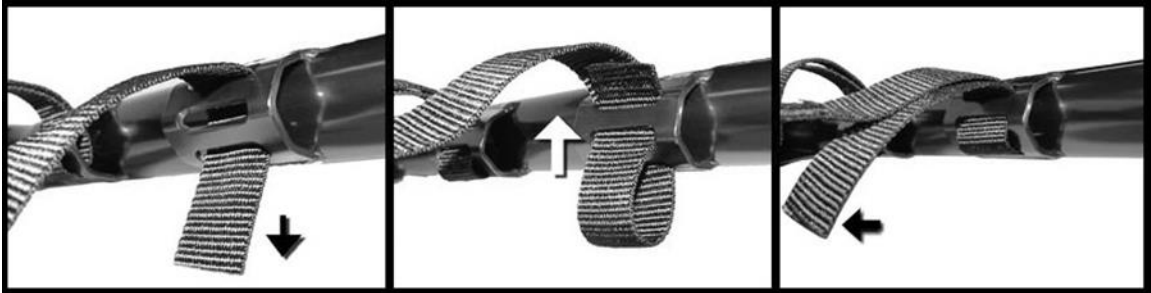

8) Recheck all bolts for tightness and you are ready to ride. After your first ride check all the bolts for tightness. Continue to check them after every few rides (or more often depending on duration of ride, etc.)

9) If you have questions or need help please call us at 619 562 0188. Please note that you can see the instructions in color on our website www.teamalbaracing.com Just go to 'tech center' on the header of the home page.

If you have any questions please let us know. 619-562-0188 or support@teamalbaracing.com.

