


Alba Racing Yamaha Warrior Nerf Bar Instructions

NOTE: For safety leave your stock heel guards installed. They are removed for clarity in these instructions. Do not ride your quad without them!


1) Install the front nerf mount (chrome tube with 2 flat tabs welded to it). See picture #1 to note how it mounts. Remove the 2 bolts that mount the fender stay to the frame. The tabs on the nerf mount will go between the fender stay and the frame. Reinstall the bolts but leave them loose.

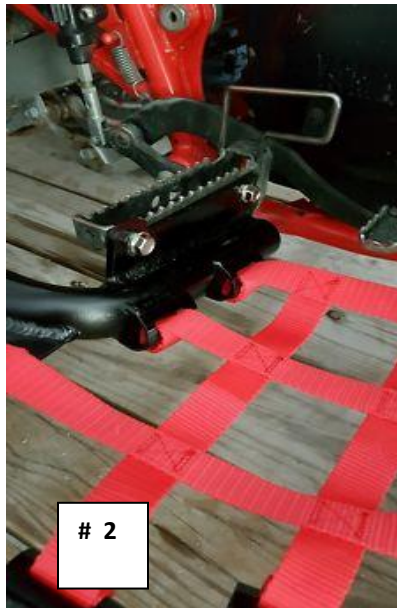

2) Mount the nerf bars one side at a time. See picture # 2 for the mount tab placement on the footpeg. Slide the nerf bar on to the front mount. Line up the holes in the tab on the back of the nerf bar with the holes in the footpeg. Use the supplied bolts, washers and locknuts (2 per side).

3) Now tighten all the bolts. There are a total of 6 to tighten. **Don't miss any.**

4) Install the nets according to the diagram. Be sure to leave enough slack on the shifter side so that you are able to get your foot under the shifter. (See pic. # 3 for finished install).

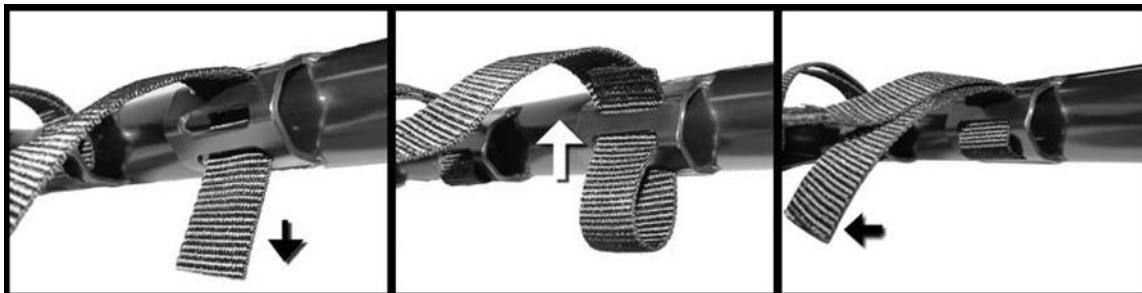

5) You are now ready to ride. After your first ride check all the bolts to ensure that they are tight and continue to recheck at a minimum every 3 rides or as often as needed.

Questions? call us at 619.562.0188 M-F 8 to 5 Pacific time